



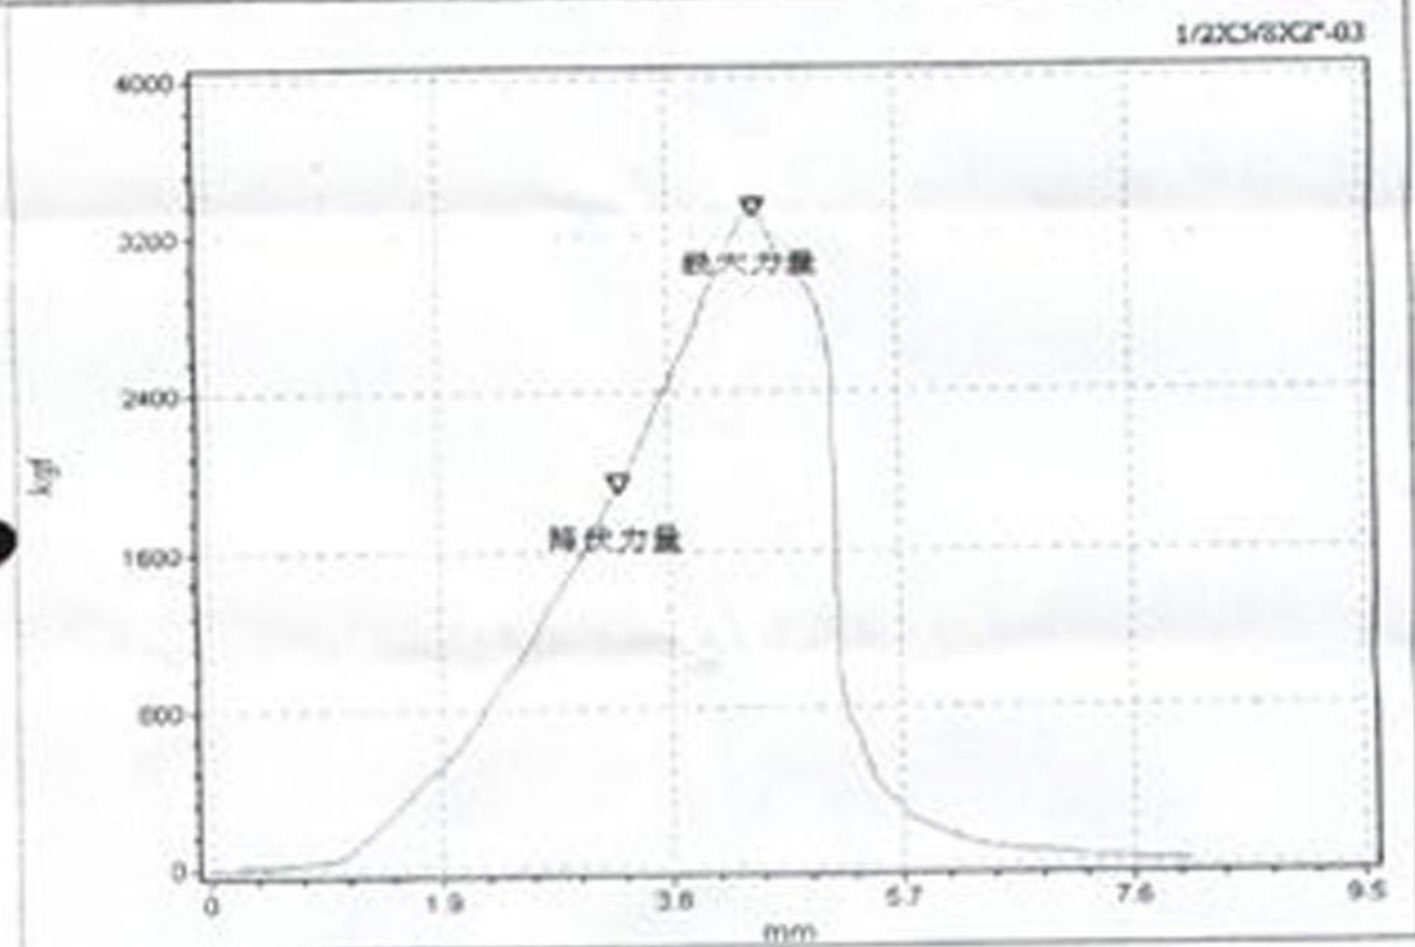
TENSION TEST DATA FORM

PO#: _____

SAMPLE _____

TESTING DATE: 08/25/2003DESCRIPTION: Drop in Anchor1/2X3/8X2"

NO.	DRILL BIT SIZE (mm)	EMBEDMENT DEPTH (mm)	THICKNESS OF MATERIAL (mm)	PUBLISHED FULL-OUTLOAD (kgf)	ACTURAL PULL-OUTLOAD (kgf)	CONCRETE STRENGTH (psi)
3	16.61	61.10	-	3200.00	3335.0	4000

CHIEF: 张经纬TESTER: 李永俊 8/25



产品品质检验报告

PRODUCT QUALITY INSPECTION REPORT

记录号
REPORT NO
加工号
PROCESS NO
日期
DATE

SAMPLE

2003. 8. 23

- A: 外包检验报告
OUT-PROCESS INSPECTION REPORT
- B: 制程检验报告
IN-PROCESS INSPECTION REPORT
- C: 转移批检验报告
LOT INSPECTION REPORT
- D: 成品最终检验报告
FINISHED PRODUCTS INSPECTION REPORT

批号 LOT NO		炉号 HEAT NO		数量 QTY						
品名 DESC	<u>DROP IN</u>	材质 MATERIAL	<u>cl008</u>	抽样数 SAMPLE QTY	<u>6 pcs</u>					
规格 SIZE	<u>1/2" x 1/8" x 1/8"</u>	镀层 PLATING	<u>2P</u>							
外观 APPEARANCE	判定 JUDGES	<input checked="" type="checkbox"/> 合格 GOOD <input type="checkbox"/> 不合格 NG								
合格质量水平 AQL%	检查项目 ITEM	标准值 STANDARD	实测值 (或仅登记最大值、最小值) ACTURAL (OR WRITE DOWN MAX MIN ONLY)							
			MAX1	MIN1	MAX2	MIN2	MAX3	MIN3	MAX4	MIN4
2.0	A	6.20/6.80	6.87	6.81	6.82	6.83	6.83	6.83		
2.5	B	13.52/14.00	13.67	13.63	13.65	13.66	13.69	13.59		
2.5	C	7.20/7.90	7.58	7.53	7.53	7.54	7.63	7.53		
6.5	D	50.50/50.90	50.57	50.37	50.57	50.66	50.57	50.55		
2.5	G	15.70/15.87	15.70	15.71	15.87	15.70	15.87	15.70		
1.5	H	±0.13mm								
6.5	I	22.50/23.00	22.52	22.64	22.50	22.48	22.72	22.56		
4.0	K	4.00/3.00	3.64	3.56	3.60	3.54	3.56	3.55		
	厚度	4.51/4.21	4.51	4.67	4.87	5.01	4.34	4.95		
判定 RESULT	<input checked="" type="checkbox"/> 合格 GOOD <input type="checkbox"/> 不合格 NG		不良原因 CAUSE OF DEFECT							

品质课长:
CHIEF OF Q.C.

李万里

检验员:
INSPECTOR

[Signature]